

# DATASHEET



## CTS MAINS MULTI-CHANNEL TANK ALARM

### Specifications

- › Mains multi-channel tank alarm for alerting of a combination or all of the following states: high, low and/or bund
- › 90db sounder and flashing orange strobe to warn of a problem
- › Zone in question lights up on screen to indicate activated state
- › Test and alarm mute functions
- › Automatically reversed float logic for low zones
- › Weatherproof IP55 enclosure
- › Standard box with multiple input voltages 110v/230v, 12v/24v DC
- › Option with relays to connect to external equipment e.g. other alarms or building management systems for remote monitoring
- › Version with relays can be used to control the pump. E.g. where a day tank fills a larger tank, it can automate pump to run when tank contents drops to set low level, and turns pump off at set high level



### Dimensions

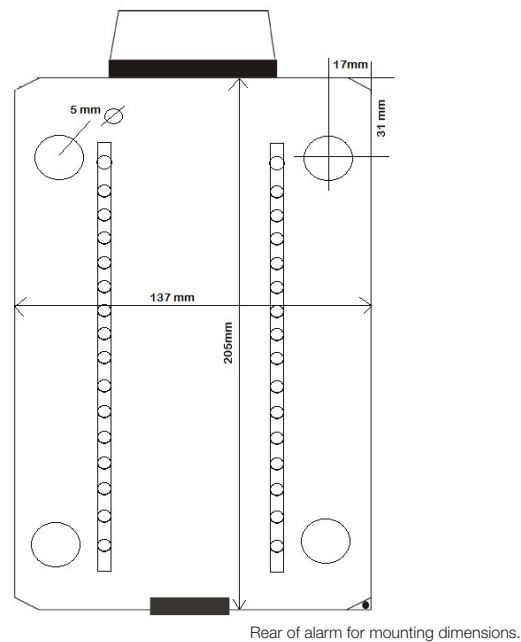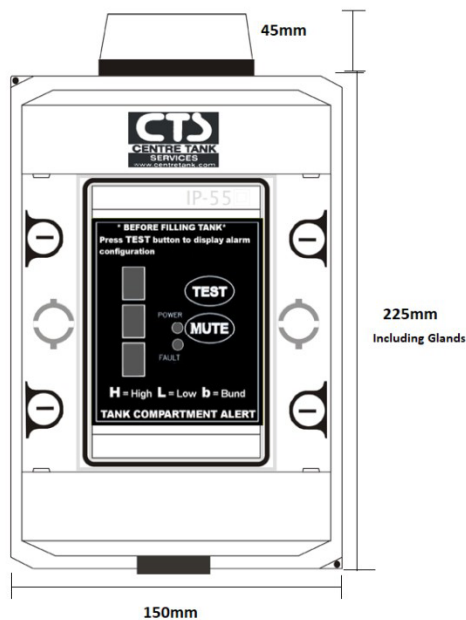

Code	Description	V	Probes	Relays	Zone	Fluids
SWS2000	Mains Multi-Compartment Alarm Box Only	110/230/12v/24v			Multi - High/Low/Bund	AF
SWS2001	Mains Multi-Compartment Alarm Box Only c/w Relays	110/230/12v/24v		3	Multi - High/Low/Bund	AF
SWS2009	Mains Multi-Compartment Alarm Box c/w Single Probe & Relays	110/230/12v/24v	Single*	3	Multi - High/Low/Bund	D O H&G
SWS2010	Mains Multi-Compartment Alarm Box c/w Single and Double Probe & Relays	110/230/12v/24v	Single & Double*	3	Multi - High/Low/Bund	D O H&G

\*95m max. probe length. **Please note:** all cables must be free of electrical noise.