



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

PIUSI 3000 SUPREME B.SMART

FEATURES

- VOLTAGE FROM 12V TO 24V*
- BLUETOOTH CONNECTION
- TOTAL CONTROL VIA APP
- VIBRATION RESISTANCE
- LOW NOISE
- COMPATIBLE WITH DIESEL UP TO B20 - HVO/XTL
- MAX. PRESSURE 1,5 BAR
- CAN ALSO BE USED WITH IButton KEY
- 3/4" THREADED INLET AND OUTLET
- IP55

Piusi 3000 Supreme B.SMART represents a breakthrough in transportable tanks, combining safety, efficiency and management. Thanks to its cutting-edge technology and full integration with the Fuel Management System B.SMART, Piusi 3000 Supreme B.SMART gives users the ability to control every aspect of their dispensing and fleet operations, enabling them to achieve unprecedented levels of performance and reliability.

If you aim for maximum efficiency and safety for your transportable tanks, Piusi 3000 Supreme B.SMART is the best choice.

PERFORMANCE

UP TO

50 L/MIN

FLOW RATE

FROM

12V TO 24V*

VOLTAGE

**S1-CONTINUOUS
DUTY**

DUTY CYCLE

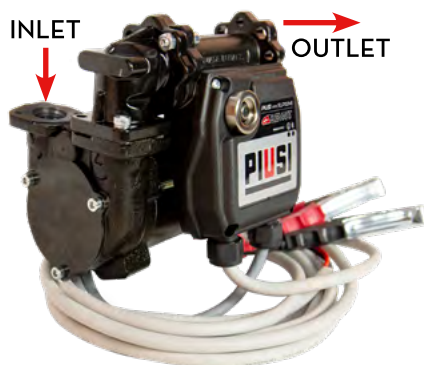
±0,5%

ACCURACY

* The Piusi 3000 Supreme does not have the ability to monitor the battery and does not provide any type of protection for it.



PIUSI 3000 SUPREME B.SMART HORIZ. PORTS



PIUSI 3000 SUPREME B.SMART
VERT. PORTS



PIUSI 3000 SUPREME B.SMART
DRUM FILTER

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO251HOA	5,4	11,9	270X190X180	-	1
FOO251VOA	5,4	11,9	270X190X180	-	1
FOO251DOA	7,4	16,3	300X300X180	-	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



HVO/XTL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



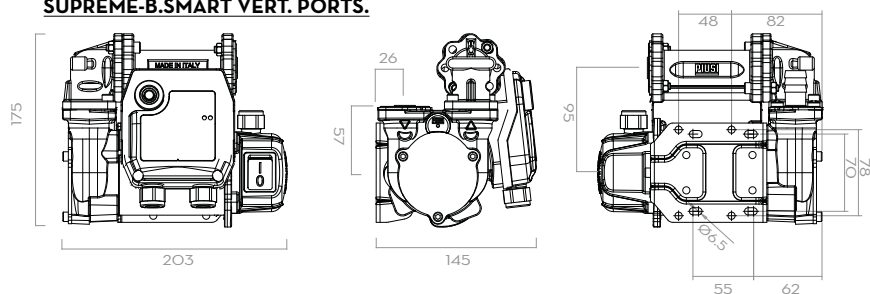
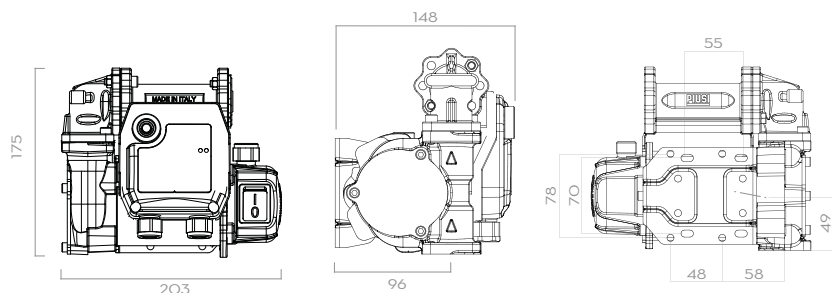
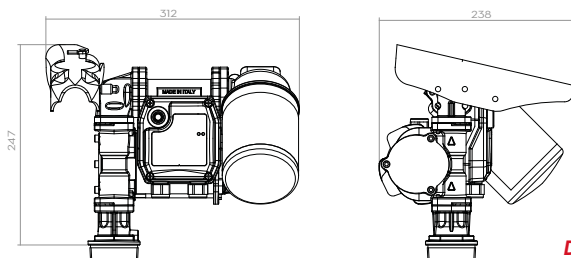
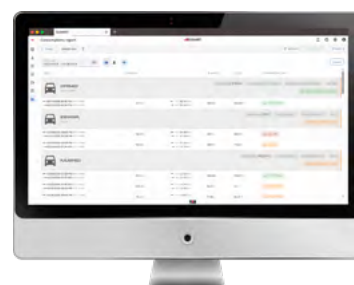
WATER



WINDSCREEN

IN THE BOX FOR FOLLOWING CONFIGURATIONS:

DRUM + FILTER			
FOO251DA	+	NOZZLE HOLDER 2" DRUM CONNECTION OIL & FUEL FILTER 2" DRUM CONNECTION	PUMP 4m ELECTRICAL CABLE IBUTTON KEY (1 PC) INSTRUCTION MANUAL
- HORIZONTAL/ VERTICAL PORTS			
FOO251HOA FOO251VOA	+	BASE BRACKET	

DIMENSIONS**SUPREME-B.SMART VERT. PORTS.****SUPREME-B.SMART HORIZ. PORTS.****SUPREME-B.SMART DRUM + FILTER***Dimensions expressed in millimeters***WEB APP****DETAILS****MATERIALS**

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VANES: ACETAL RESIN
- SEAL: NBR
- SHAFT: STEEL

ACCESSORIES

- AUTOMATIC NOZZLE A60 + HOOK
- DIESEL HOSE 4M

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			RPM	DUTY CYCLE CONTINUOUS	FUSES CAPACITY AMPERE	DIRT FILTER	NOZZLE
			L/MIN	GPM	DC VOLT	POWER WATT	AMP. MAX.					
FOO251HOA	SUPREME-B.SMART HORIZ. PORTS +IO DRIV		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-
FOO251VOA	SUPREME-B.SMART VERT. PORTS +IO DRIV		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-
FOO251DOA	SUPREME-B.SMART DRUM +FILTER +IO DRIV		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	YES	-