



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

PIUSI 3000 SUPREME

FEATURES

- VOLTAGE FROM 12V TO 24V*
- BLUETOOTH CONNECTION
- TOTAL CONTROL VIA APP
- VIBRATION RESISTANCE
- LOW NOISE
- COMPATIBLE WITH DIESEL UP TO B20 - HVO/XTL
- MAX. PRESSURE 1,5 BAR
- CAN ALSO BE USED WITH IBUTTON
- 3/4" THREADED INLET AND OUTLET
- IP55

The **PIUSI 3000 SUPREME** is a highly innovative device designed to offer full pump control and management from a smartphone app or, thus helping users fill up with diesel from mobile tanks quickly and safely.

The PIUSI 3000 SUPREME combines new digital technologies with PIUSI's long and proven track-record in the design of fluid management systems such as pumps and flow meters. This new pump is designed to dispense diesel, measure the volume dispensed, manage operator access and solve the problems typically faced by users of transportable tanks.

PERFORMANCE

UP TO

50 L/MIN

FLOW RATE

FROM

12V TO 24V*

VOLTAGE


**S1 - CONTINUOUS
DUTY**

DUTY CYCLE


±0,5%

ACCURACY

* The Piusi 3000 Supreme does not have the ability to monitor the battery and does not provide any type of protection for it.

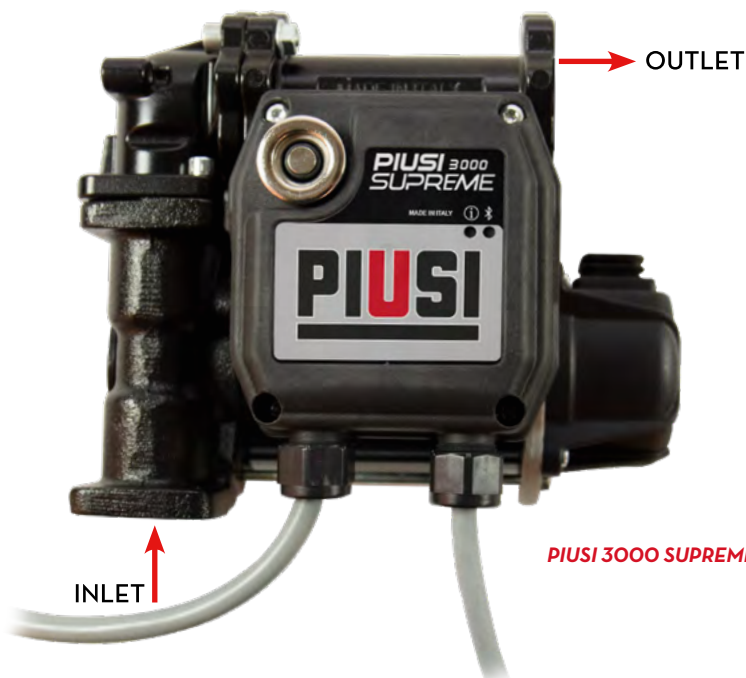

PIUSI 3000 SUPREME HORIZ.PORTS

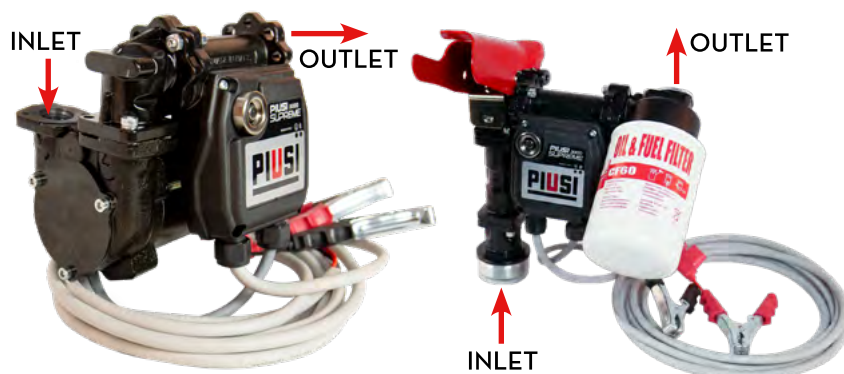

PIUSI 3000 SUPREME VERT.PORTS

PIUSI 3000 SUPREME DRUM FILTER

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0250HOA	5,4	11,9	270X190X180	-	1
FO0250VOA	5,4	11,9	270X190X180	-	1
FO0250DOA	7,4	16,3	300X300X180	-	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



HVO/XTL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN




Usable with APP
for full control




Also usable in Plug & Play
mode with iButton key

DIMENSIONS


PIUSI 3000 SUPREME VERT. PORTS.

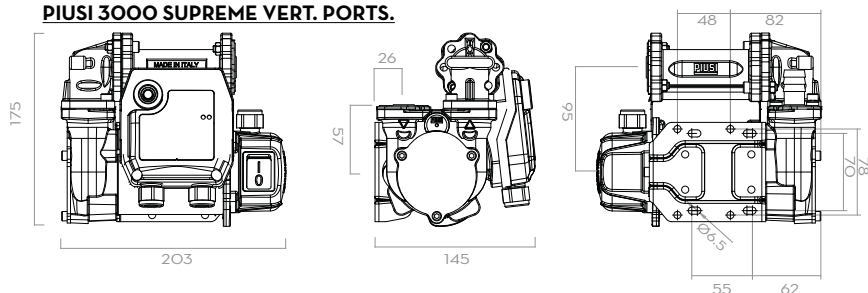

PIUSI 3000 SUPREME HORIZ. PORTS.

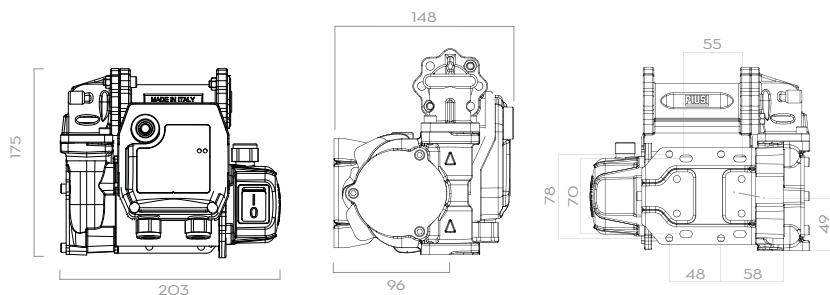

PIUSI 3000 SUPREME DRUM + FILTER

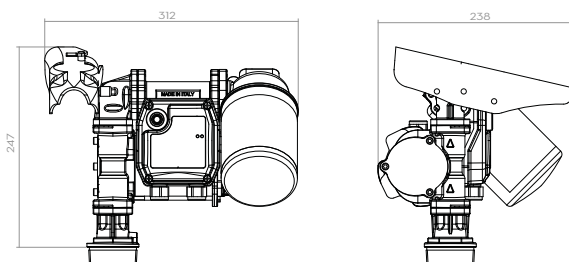

Dimensions expressed in millimeters

IN THE BOX

- PUMPS
- ELECTRIC CABLE 4M
- OIL & FUEL FILTER (FOO25ODOA)
- 2" SUCTION CONNECTION (FOO25ODOA)
- BASE BRACKET (FOO25OHOA, FOO25OVOA)
- NOZZLE HOLDER (FOO25ODOA)
- ACCESS KEY I-BUTTON (10PZ)
- INSTRUCTION MANUAL

DETAILS



OIL & FUEL FILTER



ELECTRIC CABLE



10 PZ ACCESS KEY I-BUTTON

COMPONENTS

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VANES: ACETAL RESIN
- SEAL: NBR
- SHAFT: STEEL

ACCESSORIES

- AUTOMATIC NOZZLE A60 + HOOK
- DIESEL HOSE 4M

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			RPM	DUTY CYCLE CONTINUOUS	FUSES CAPACITY AMPERE	SPIN ON FILTER	NOZZLE
			L/MIN	GPM	DC VOLT	POWER WATT	AMP. MAX.					
FOO25OHOA	PIUSI 3000 SUPREME HORIZ. PORTS +10 KEYS		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-
FOO25OVOA	PIUSI 3000 SUPREME VERT. PORTS +10 KEYS		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-
FOO25ODOA	PIUSI 3000 SUPREME DRUM +FILTER +10 KEYS		50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	YES	-

PIUSI 3000 SUPREME