

DATASHEET

CTS MAINS MULTI-ZONE TANK ALARM



CTS
CENTRE TANK
SERVICES LTD



OFFICIAL UAE
DISTRIBUTOR

Specifications

- › Mains multi-zone tank alarm for alerting of a combination or all of the following states: high, low and/or bund of a double walled tank
- › 90db sounder and flashing orange strobe to warn of a problem
- › Zone in question lights up on screen to indicate activated state
- › Test and alarm mute functions
- › Automatically reversed float logic for low zones
- › Weatherproof IP55 enclosure
- › Standard box with multiple input voltages 110v/230v, 12v/24v DC
- › Option with relays to connect to external equipment e.g. other alarms or building management systems for remote monitoring
- › Version with relays can be used to control the pump. E.g. where a day tank fills a larger tank, it can automate pump to run when tank contents drops to set low level, and turns pump off at set high level



Dimensions

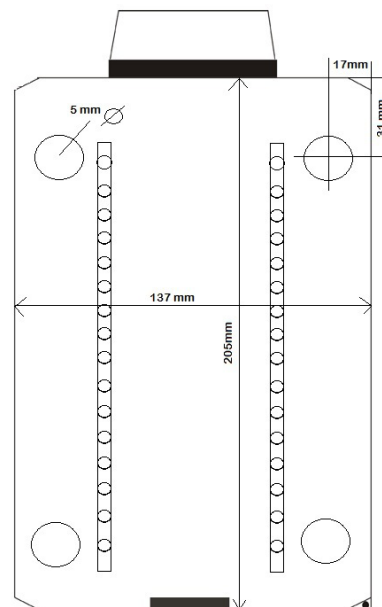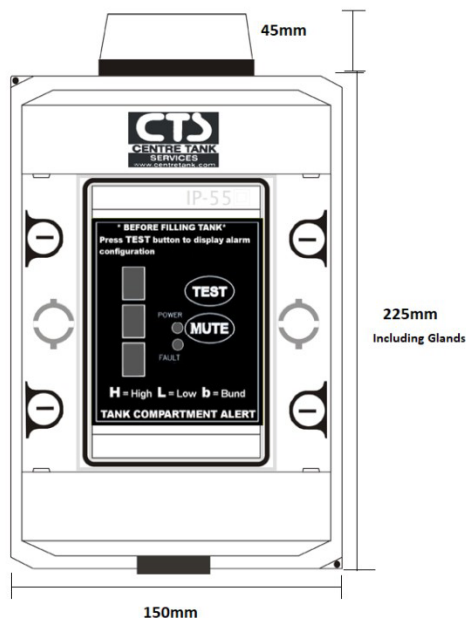

Rear of alarm for mounting dimensions.

Code	Description	V	Probes	Relays	Zone	Fluids
SWS2000	Mains Multi-Zone Alarm Box Only	110/230/12v/24v			Multi - High/Low/Bund	AF
SWS2001	Mains Multi-Zone Alarm Box Only c/w Relays	110/230/12v/24v		3	Multi - High/Low/Bund	AF
SWS2009	Mains Multi-Zone Alarm Box c/w Single Probe & Relays	110/230/12v/24v	Single*	3	Multi - High/Low/Bund	D O H&G
SWS2010	Mains Multi-Zone Alarm Box c/w Single and Double Probe & Relays	110/230/12v/24v	Single & Double*	3	Multi - High/Low/Bund	D O H&G

*95m max. probe length. **Please note:** all cables must be free of electrical noise.