

# DATASHEET

## CTS MAINS SINGLE ZONE TANK ALARM



**CTS**  
CENTRE TANK  
SERVICES LTD


OFFICIAL UAE  
DISTRIBUTOR

### Specifications

- › For warning of a choice of high level, low level or bund alert
- › Weatherproof IP55 enclosure
- › Red LED text display to indicate the issue & 90dB sounder
- › Test and alarm mute functions
- › 4 x external mounting lugs
- › Automatic reversed float logic if 'low' alert is selected
- › Available in mains power
- › Comes with volt-free contact relay for connecting to a BMS for remote monitoring or another alarm
- › Versions with diesel/oil probe for fuel tanks
- › Versions without probe for use with fluids other than diesel/oil
- › 25m max probe length



### Dimensions

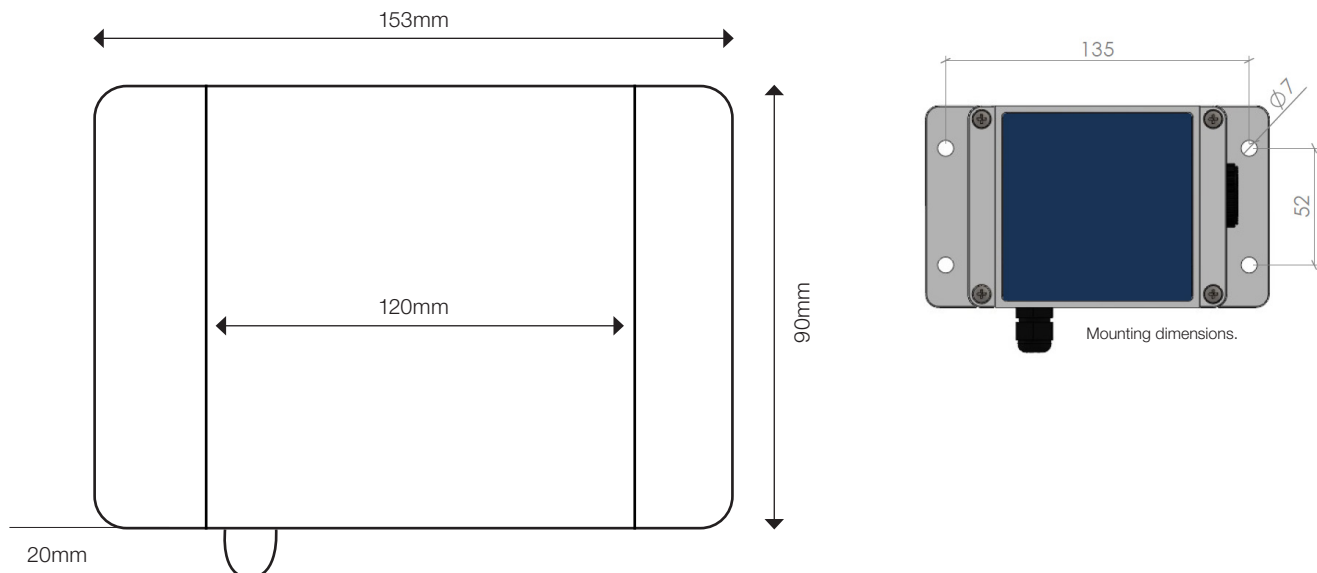

Code	Description	Power	Probe	Relay	Zone	Fluids
SWS2002	Mains Single Zone Tank Alarm c/w Probe	230v	✓	✓	Single - High or Low or Bund	D O H&G
SWS2003	Mains Single Zone Tank Alarm Battery Back-up c/w Probe	230v	✓	✓	Single - High or Low or Bund	D O H&G
SWS2004	Mains Single Zone Tank Alarm Only	230v		✓	Single - High or Low or Bund	AF
SWS2007	Mains Single Zone Tank Alarm Battery Back-up Only	230v		✓	Single - High or Low or Bund	AF
SWS1009	Alarm Cable Per Metre for Remote Installation					AF

\*25m max. probe length. **Please note:** all cables must be free of electrical noise.