DEF Safe-T-Break®

Husky GENERAL FUELING PRODUCTS

Stop the flow of fluid on both sides of the separation.

Model #7219

- Non-reconnectable Safe-T-Break®
- Low profile design.
- Thread sealant not required with BSPP threads.
- 100% DEF compatible parts.
- Instant-closing, dual poppet check valve design.
- Maximum separation of 300 lbf / 1334.5 N.
- Comes standard with guard.

Model #8216

- Reconnectable Safe-T-Break®
- Maximum separation of 200 lbf / 889.6 N.
- 100% DEF compatible parts.
- Thread sealant not required with BSPP threads.
- Instant-closing, dual poppet check valve design.
- Comes standard with guard.

Safe-T-Breaks®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
7219	1" M x 1" M Stainless Steel Non-Reconnectable Safe-T-Break®	0.90 (.40)
8216	1" M x 1" M Stainless Steel Reconnectable Safe-T-Break®	0.94 (.43)

Construction

Body	Stainless Steel
Seals	Fluorocarbon
Inlet	1" / 25.4 mm BSPP

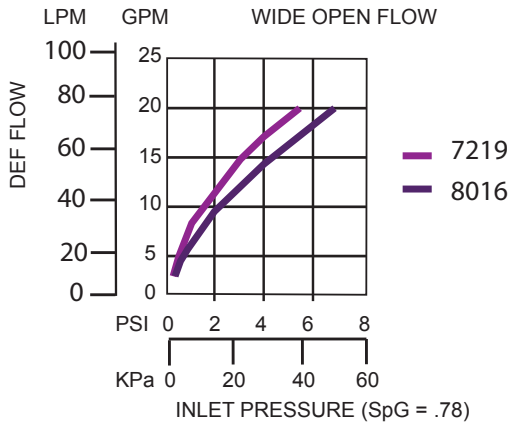

Model 8216

Model 7219

ISO 9001:2008 QUALITY SYSTEM

DEF Safe-T-Break®

Stop the flow of fluid on both sides of the separation.

Dimensions and System Options

Guards

MODEL NO.	DESCRIPTION
7224	Black Scuff Guard
6503	Dispenser Scuff Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
7407	1" BSPP Seal Kit Assembly

Model 7219

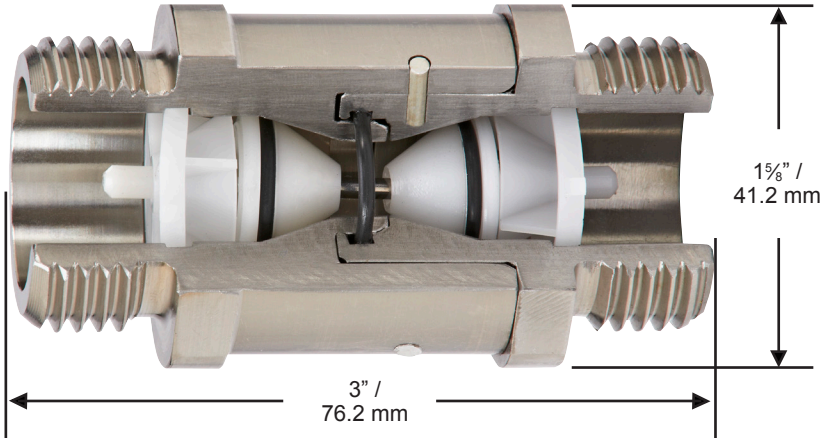

Model 8216

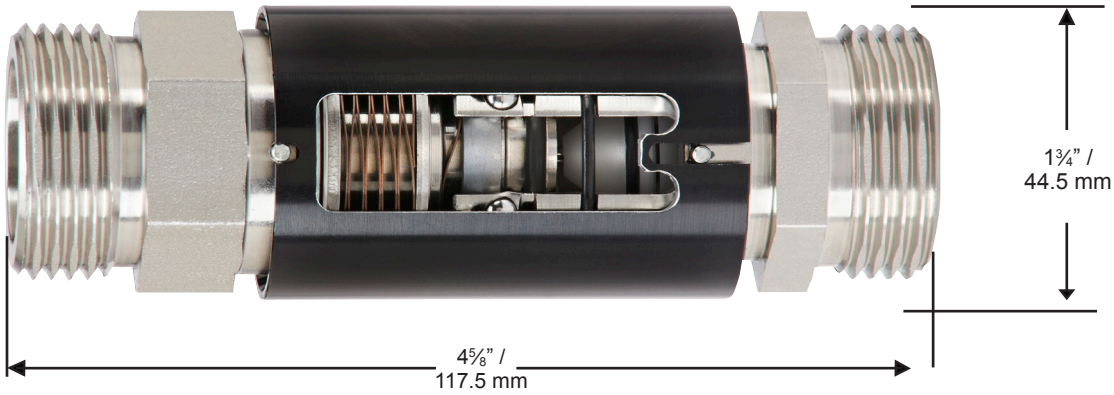

2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.